




TECHNICAL DATA SHEET FOR MAX-04 13% Carbon 2% Graphite filled PTFE Polyblend

PHYSICAL PROPERTIES

Low Flow Polytetrafluoroethylene (nff)

Test Method	Properties	Units	Typical Value
ASTM 4745	Tensile	PSI	3400
ASTM 4745	Elongation	%	200 min
ASTM D2240	Shore Hardness	Shore D	60 min
ASTM D4745	Specific Gravity	G/CC	2.13
ASTM D4745	Bulk Density	g/L	480
ASTM D4745	Diametric Shrinkage	%	2.5

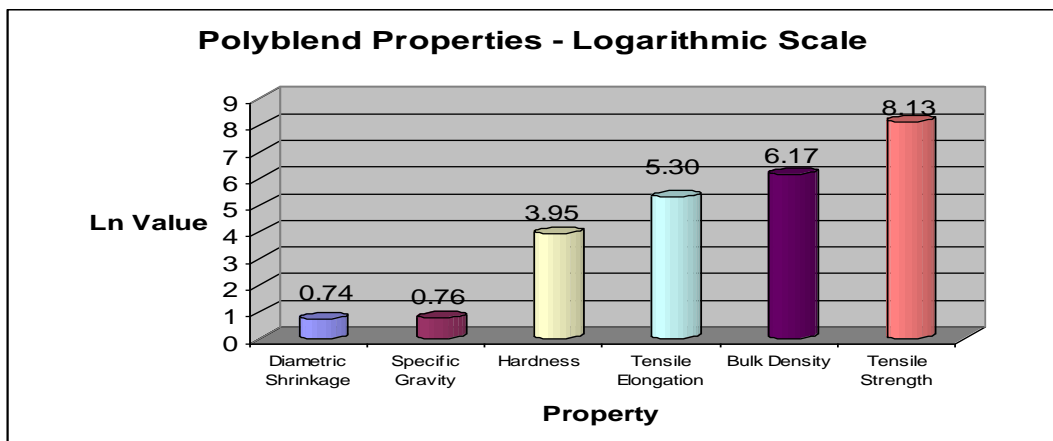

The above information is, to the best of our knowledge, true and accurate. No warranty, expressed or implied, is made or intended. The use of this product should be determined by the user, based on their appraisal.

Contact:

PTFE Industries

9426 Katy Freeway BLDG 7

Houston, TX 77055